


CODING

- 336046

ISO 9001:2015
Reg. No. 00705-1-007-1-Q005



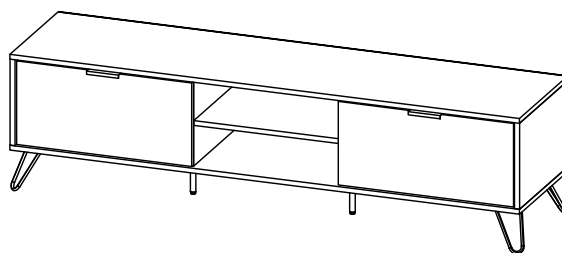















nuhoom.com

Read the instructions carefully. Remove all the wrappings , staples and straps from the carton. Refer to the hardware and furniture part list for guidance. Make sure that you have all the parts before you start assembling. Place all the wooden furniture parts on a clean, flat and soft surface, such as a carpet or rubbermat to prevent scratches.

CAUTION

KEEP ALL THE PARTS OUT OF CHILDREN'S REACH.

HARDWARE

A	MINI FIX	A1  A2  A3 	8 SETS
B	M8 X 30MM WOOD DOWEL		16 PCS
C	M6 X 50MM CSK CAP WOOD SCREW		8 PCS
D	ALLEN KEY M4		1 PC
E	M3 X 12MM C.B SCREW		4 PCS
F	M3.5 X 16MM C.B SCREW		58 PCS
G	METAL SHELF SUPPORT		4 PCS
H	5/8 NAIL		30 PCS
I	STOPPER(2 PIN)		2 PCS
J	HANDLE EM 0071		2 PCS
K	SOFT CLOSING 7/8 HINGES		4 PCS
L	10" AIR PRESS PULL ROD	L1  L2  L3 	2 SETS
M	METAL LEG 90 x 90 x 10 x H145MM		4 PCS
N	METAL LEG 50 x 50 x H140MM (CENTER)		2 PCS

PART LIST		QTY
1	TOP PANEL	1 PC
2	BOTTOM PANEL	1 PC
3	SIDE PANEL (L)	1 PC
4	SIDE PANEL (R)	1 PC
5	CENTER PANEL (L)	1 PC
6	CENTER PANEL (R)	1 PC
7	SHELF PANEL	1 PC
8	BACK PANEL	1 PC
9	DOOR PANEL (L)	1 PC
10	DOOR PANEL (R)	1 PC


SELF-PREPARED TOOLS: Tools below are NOT included in package.



SCREWDRIVER




HAMMER

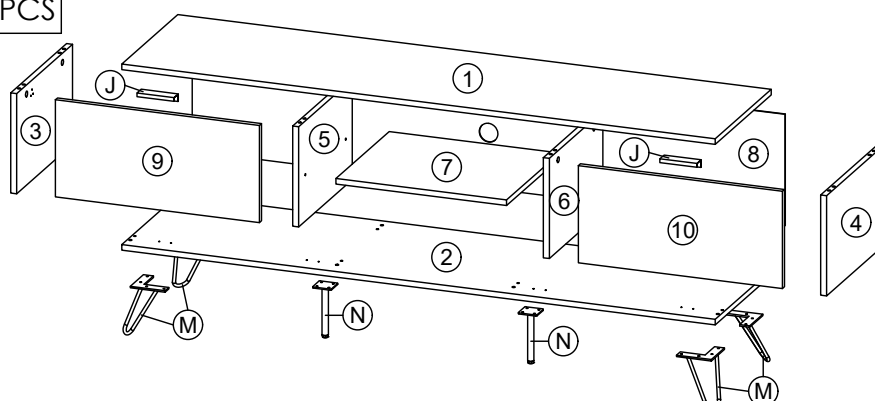

CODING

- 336046


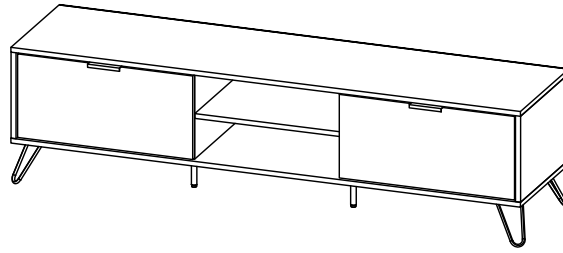


ISO 9001:2015
Reg. No. 00705-1-2017-1-Q005

nuhoom.com

STEP 1



- Insert hardware **A1** onto panel (5) and (6).
(Repeat 4 times.)
- Insert hardware **A2** onto panel (1).
(Repeat 8 times.)
- Insert hardware **B** onto panel (5) and (6).
(Repeat 8 times.)
- Hit hardware **I** onto panel (1).
(Repeat 2 times.)

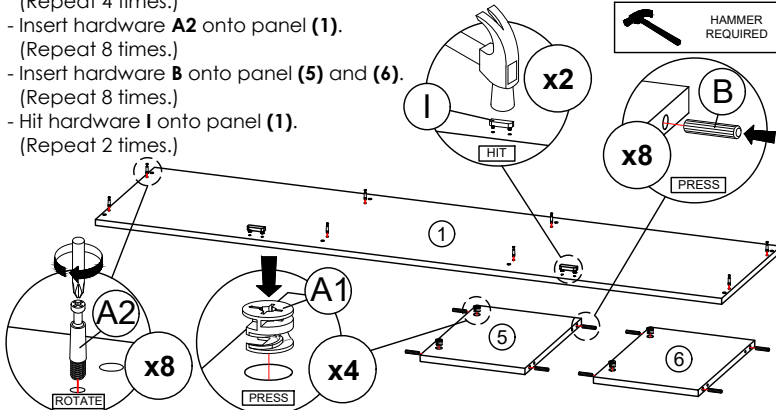

* Ensure the arrows on hardware **A1** point towards mounting positions.

STEP 3


- Attach panel (1) to panel (3), (4), (5) and (6).
- Insert all hardware **A2** into **A1**.
- Rotate all **A1** until tight.
- Apply **A3** onto all **A1**.
(Repeat 8 times.)

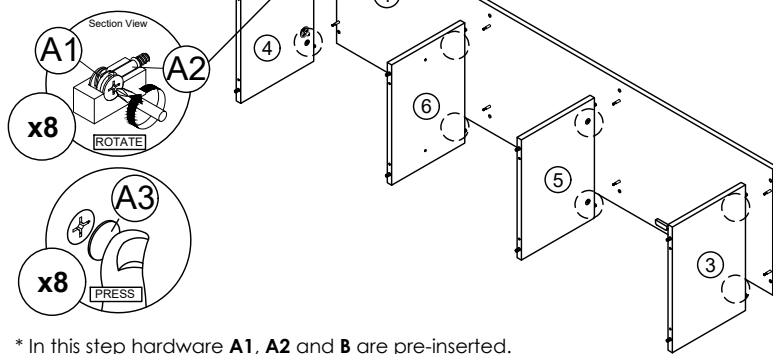

* In this step hardware **A1**, **A2** and **B** are pre-inserted.


STEP 5

- Assemble panel (8) to entire body with hardware **H**.
(Repeat 30 times.)

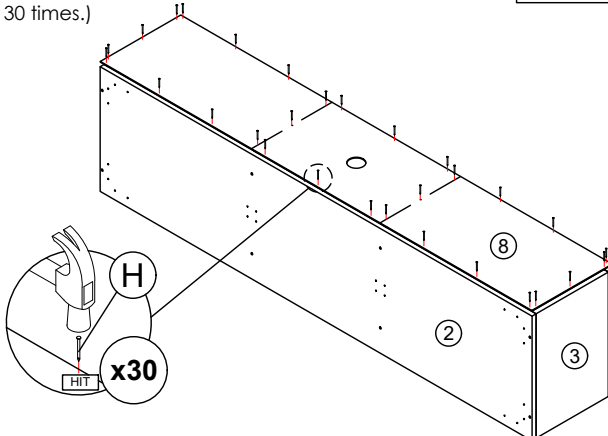

STEP 2



- Assemble hardware **L2** onto panel (3) and (4) by using hardware **F**.
(Repeat 3 times for each hardware.)
- Insert hardware **A1** onto panel (3) and (4).
(Repeat 4 times.)
- Insert hardware **B** onto panel (3) and (4).
(Repeat 8 times.)

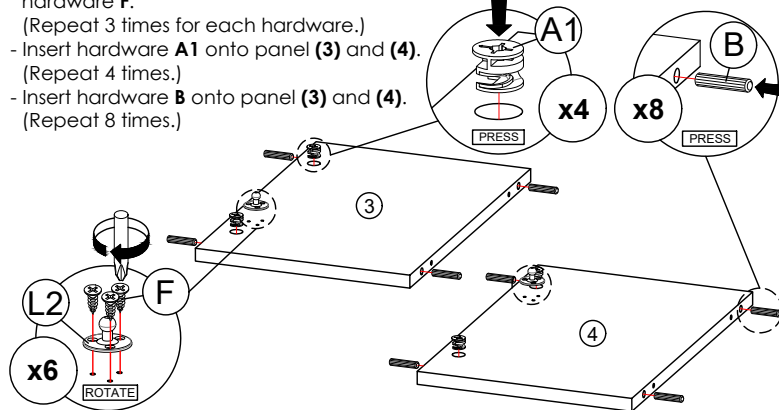

* Ensure the arrows on hardware **A1** point towards mounting positions.

STEP 4


- Connect panel (2) to panel (3), (4), (5) and (6) by using hardware **C** and **D**.
(Repeat 8 times.)

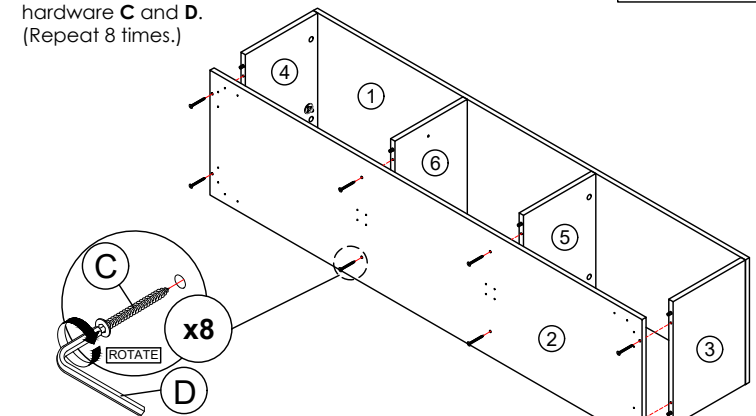

* In this step hardware **B** are pre-inserted.

STEP 6


- Assemble hardware **M** and **N** onto panel (2) by using hardware **F**.
(Repeat 4 times for each hardware.)

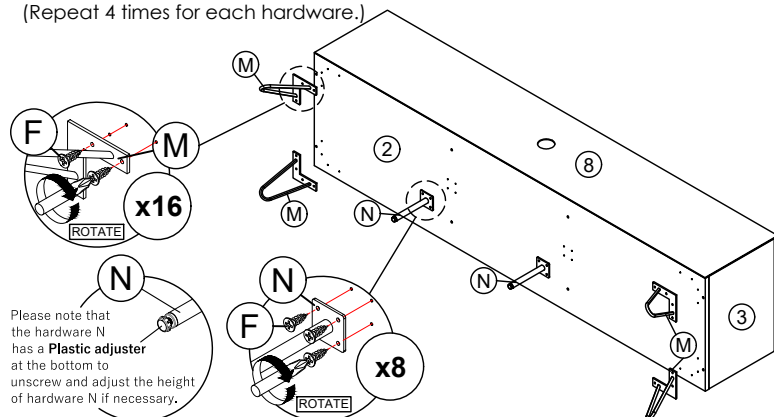

Please note that the hardware **N** has a **Plastic adjuster** at the bottom to unscrew and adjust the height of hardware **N** if necessary.

CODING

- 336046

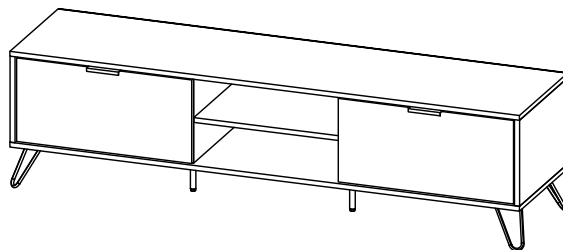


ISO 9001:2015
Reg. No. 00705-1-2017-1-QMS

nuhoom.com


STEP 7

- Insert hardware **G** into mounting positions on panel **(5)** and **(6)** by hand.
(Repeat 4 times.)

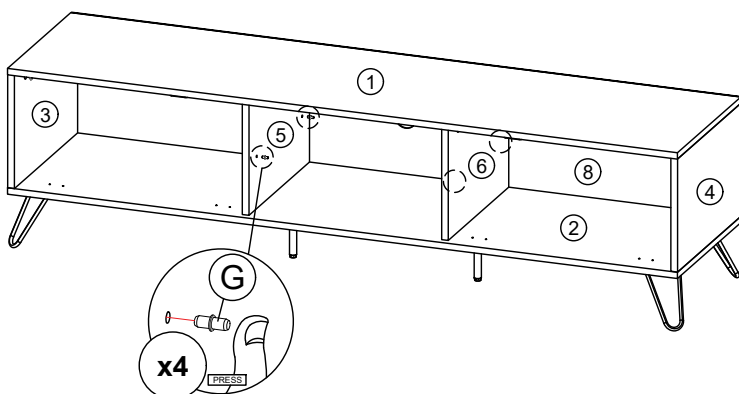


STEP 8

- Assemble panel **(7)** into between panel **(5)** and **(6)**.
(Repeat 1 times.)

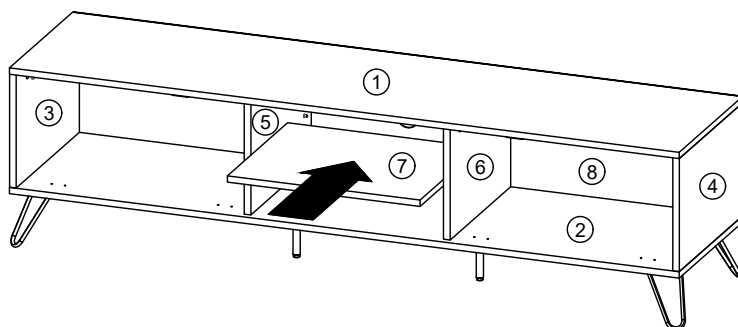

STEP 9


- Fix hardware **K** onto panel **(9)** and **(10)** by using hardware **F**.
(Repeat 2 times for each hardware.)
- Assemble hardware **L3** onto panel **(9)** and **(10)** by using hardware **F**.
(Repeat 2 times for each hardware.)

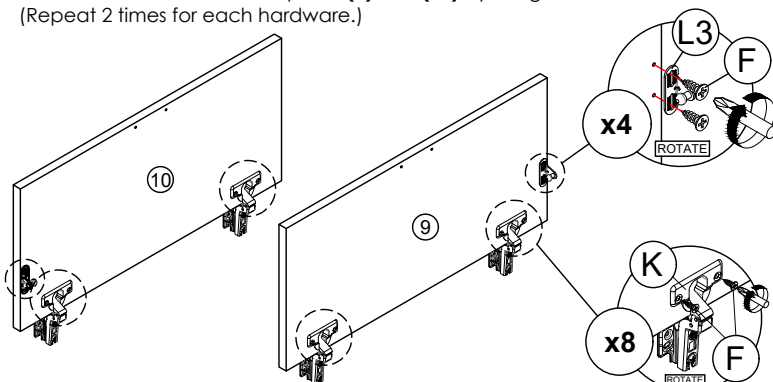

* In this step hardware **G** are pre-inserted.


STEP 10

- Fix hardware **J** onto panel **(9)** and **(10)** by using hardware **E**.
(Repeat 2 times for each hardware.)

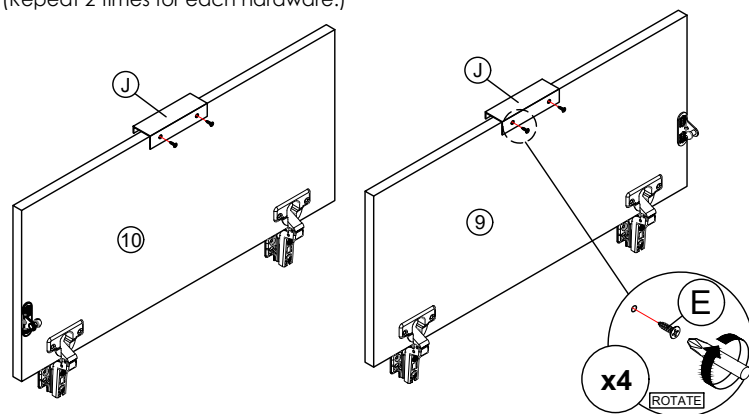


STEP 11

- Fix hardware **K** into panel **(2)** by using hardware **F**.
(Repeat 4 times for each hardware.)
- Tighten or loosen the screw to adjust position of panel **(9)** and **(10)**.
(Do only when needed.)

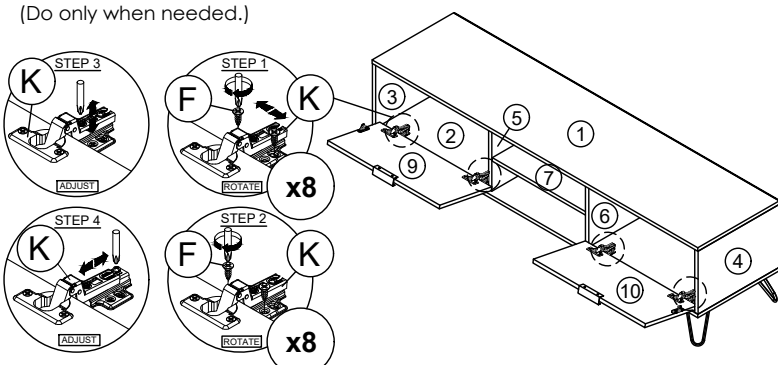

STEP 12

- Fix hardware **L1** to **L2** and **L3** by hand.
(Repeat 2 times.)

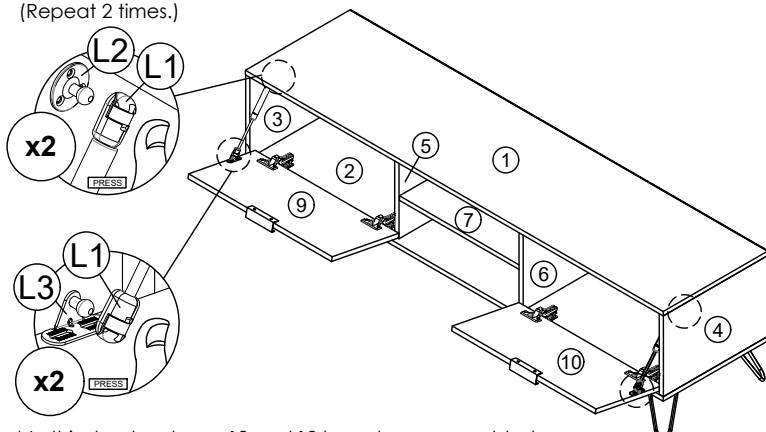

* In this step hardware **L2** and **L3** have been assembled.

* In this step hardware **K** have been assembled in panel **(9)** and **(10)**.